PRODUCT SPECIFICATIONS

HDV500 Direct Vent

GLASS VIEWING AREA

32 15/16"W x 22 3/16"H (731 Square Inches)

TECHNICAL INFORMATION

Max. Btu Input: 41,000 BTU/HR
Ignition System: Standing Pilot or Electronic
Gas Type: Natural or LP
Flue Type: Simpson Dura-Vent, Selkirk Metalbestos, MetalFab
Termination: Rear/Top Vent Convertible
Clearance to Flue for Interior: 3" Top 1" Bottom and Sides
Clearance to Flue for Outside Wall: 1"
Clearance to Fireplace: 0"
CSA Design Certified

FIELD INSTALLED ACCESSORIES

Louvers: Brass, Pewter
Curved Trim: Brass, Pewter, Black
Medium Trim Kit: Brass, Pewter, Black
Firebrick: Cottage Clay or Cottage Red (firebrick purchase is required)
Variable Thermostat Controlled Dual Forced Air Blower (160 cfm) - BLOTSDV
Mesh Glass Cover
Ambient Technologies™ Remote Controls and Thermostats
Wood Cabinet Surrounds
Designer Facings

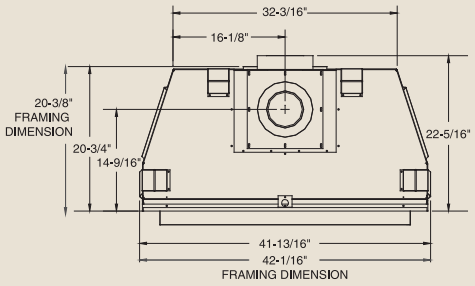

TOP VIEW

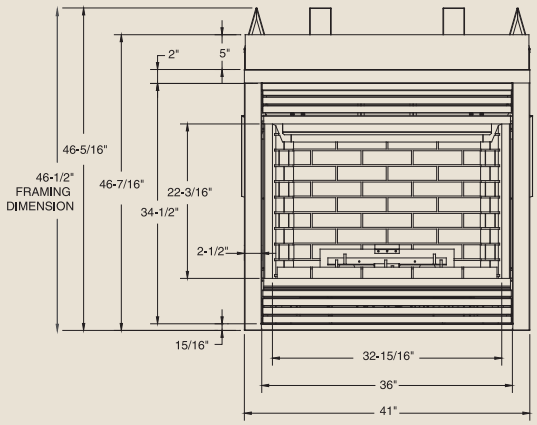

FRONT VIEW

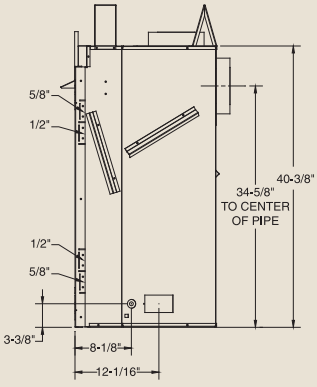

SIDE VIEW

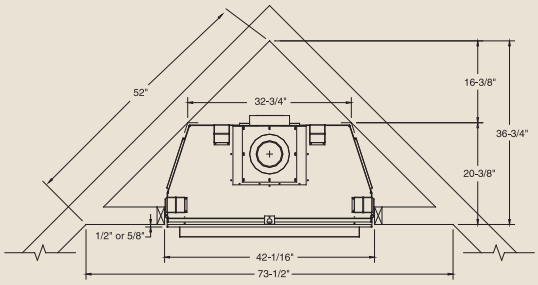

CORNER INSTALLATION

MADE IN U.S.A.

A Brand of Monessen Hearth Systems Co.
149 Cleveland Drive, Paris, Kentucky 40361
www.monessenhearth.com

Monessen

To avoid personal injury or property damage, the product described by this brochure must be installed, operated and maintained in strict compliance with the instructions packaged with the product and all applicable building or fire codes. Contact local building or fire officials about restrictions and installation inspection requirements. All photographs and drawings on this brochure are for illustrative purposes only and are not intended for, nor should they be used as a substitute for the instructions packaged with the unit. Appearance and specifications of the product are subject to change without notice. © 2007 Monessen Hearth Systems Co.